





# **OUTLINE DRAWING: UNIT: mm**

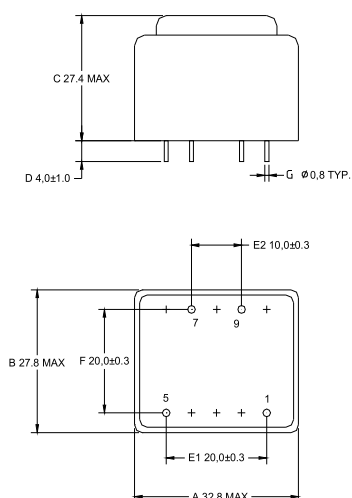

# **SCHEMATIC:**

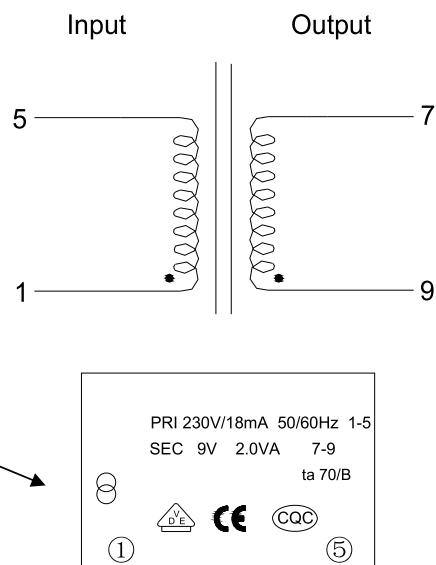

# **ELECTRICAL SPECIFICATION:**

| ITEM                    | TERMINAL | SPECIFICATION | TEST CONDITION              | TEST INSTRUMENTS |
|-------------------------|----------|---------------|-----------------------------|------------------|
| EXCITATION CURRENT (mA) | 1--5     | 11 MAX        | Input: (1--5)<br>230V/ 50Hz | GDW 4033A        |
| LOSS POWER (W)          | 1--5     | 0.8 MAX       |                             |                  |
| Load Voltage (V)        | 7--9     | 9±10% @ 222mA |                             |                  |
| No-Load Voltage(V)      | 7--9     | 15.5 Max      |                             |                  |
| RESISTANCE (Ω)          | 1--5     | 2420±10%      | Ta=25°C                     | TH2512B          |
|                         | 7--9     | 15.5±15%      |                             |                  |
| INSULATION RESISTANCE   | P--S     | 100MΩ MIN     | DC500V /1min                | CS5603           |
| HI-POT                  | P--S     | 4200V 1mA 1s  | 50Hz                        |                  |