


SIM pin assignment	
PIN#	Name
C1	VCC 供电电压
C2	RST 重置
C3	CLK 时钟
C5	GND 接地
C6	VPP 程序电压
C7	I/O 输入输出

Specification

**MATERIAL:**  
 Insulator: High Temperature Thermoplastic, UL 94V-0.  
 Contact: Copper Alloy  
 SELL: SIS

**PLATING:**  
 Contact: Plated 50µ" Ni Downhill Contact No III  
 Shell: Plated 50µ" Ni Overall  
 Plated In/A Selective Contact Area

**Electrical:**  
 Current Rating: 0.50A AC/DC max.  
 Voltage Rating: 125V AC/DC  
 Ambient Temperature Range: -20° C +70° C  
 Storage Temperature Range: -40° C +70° C  
 Ambient Humidity Range: 90% R.H. Max.  
 Contact Resistance: 30m Ω max.  
 Insulation Resistance: 1000M Ω min./500VDC  
 Mating Cycles: 10,000 Insertions  
 产品使用寿命: 200° C 10,000 次插拔  
 Mating Cycles: 3,000 Insertions Min

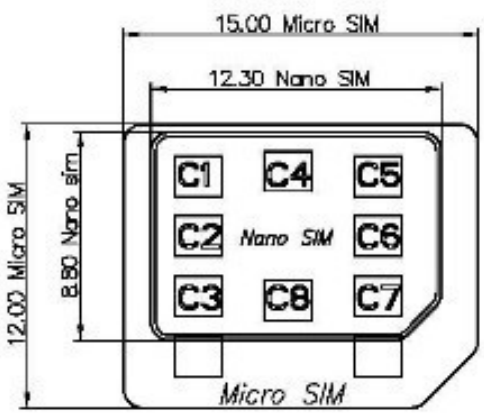

REV	DATE	BY	CHK	APP

DESIGNED BY: 王磊	DATE: 2015/04/11
CHECKED BY: 王磊	DATE: 2015/04/11
APPROVED BY: 王磊	DATE: 2015/04/11
SCALE: 1:1	FILE: 1-1