


0.30 PUSH STROKE POSITION
 1.00 CARD LOCK POSITION
 4.10 CARD EJECT POSITION

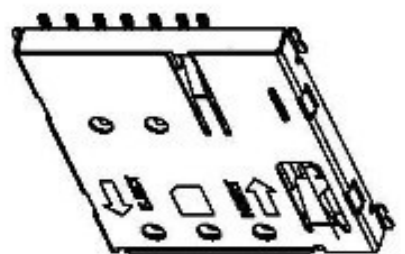


Specification



MATERIAL:
 Insulator: High Temperature Thermoplastic, UL 94V-0
 Contact: Outer Alloy
 SUBL: SUS

PLATING:
 Contact: Plated 60μ" Ni Overall Contact Au 30
 Shell: Plated 50μ" Ni Overall
 Plated Au/Au Selective Contact Area

Electrical:
 Current Rating :0.5mA AC/DC max.
 Voltage Rating :125V AC/DC
 Ambient Temperature Range :-20° C~+60° C
 Storage Temperature Range :-40° C~+70° C
 Ambient Humidity Range :95% R.H. Max.
 Contact Resistance:100m Ω
 Insulation Resistance:1000M Ω min./50%RH
 Waring Cycles:10,000 Insertions
 产品符合标准: 30° C ±0.1℃, ±0.1mm/s
 Waring Cycles:5,000-10,000 Insertions

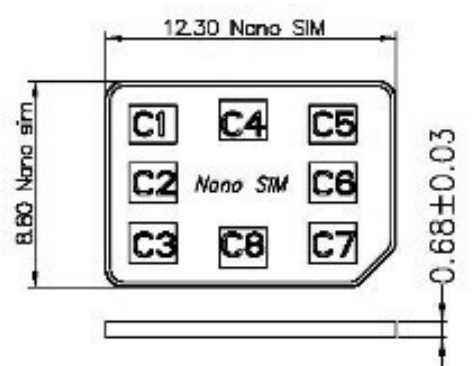

SIM pin assignment	
PIN#	Name
C1	VCC供电电压
C2	RST复位
C3	CLK时钟
C5	GND接地
C6	VPP程序电压
C7	I/O输入输出

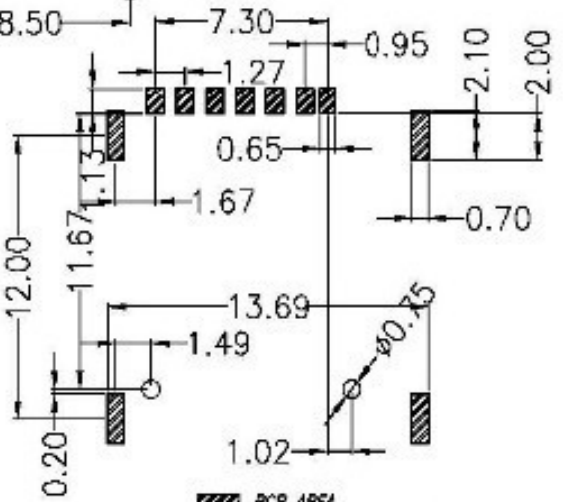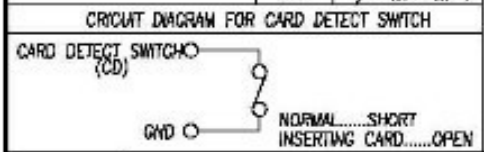

RECOMMENDED PCB LAYOUT
 GENERAL TOLERANCE ±0.05

REVISION NO.	REV. NO.	DESCRIPTION	DATE
1	1		2015/04/11
2	1		2015/04/11
3	1		2015/04/11

DESIGNER:	CHKD:	DATE:	2015/04/10
PROJECT FILE:	DATE:	DATE:	2015/04/11
PLACING FILE:	APPVAL:	DATE:	2015/04/11
SCALE:	REV. NO.:	REV.:	FILE:
1:1	01	A	1-1