





FSY4020X05L(M)(H) FSY4020X12L(M)(H) FSY4020X24L(M)(H)

Features

Size: 40×40×20mm(1.57×1.57×0.79in)
Frame/Impeller: Reinforced Plastic UL94V-0
Bearings: Ball Bearing&Sleeve Bearing
Life Expectancy: 50,000 Hours at 20°C -Ball
30,000 Hours at 20°C-Sleeve
Approvals: UL CUL TUV CE RoHS
Weight: 25g

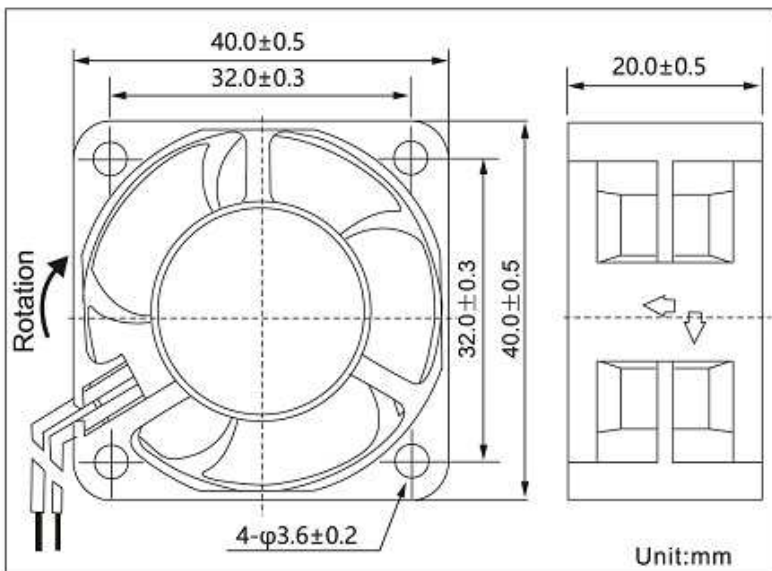

Air Flow vs Air Pressure

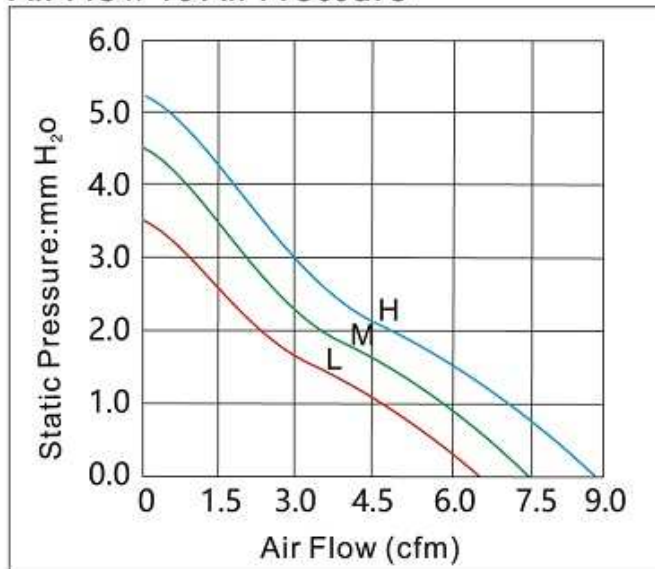

Performance

Model	Bearing System X			Rated Voltage (V)	Current (A)	Input Power (W)	Nominal Speed (R.P.M)	Air Flow (CFM)	Air Pressure (mm-H ₂ O)	Noise (dBA)
	S	B	D							
FSY4020X05L	✓	✓	✓	5	0.12	0.60	5500	6.42	3.52	26
FSY4020X05M	✓	✓	✓	5	0.15	0.75	6500	7.45	4.50	28
FSY4020X05H	✓	✓	✓	5	0.20	1.00	7500	8.85	5.25	30
FSY4020X12L	✓	✓	✓	12	0.06	0.72	5500	6.42	3.52	28
FSY4020X12M	✓	✓	✓	12	0.08	0.96	6500	7.45	4.50	28
FSY4020X12H	✓	✓	✓	12	0.10	1.20	7500	8.85	5.25	30
FSY4020X24L	✓	✓	✓	24	0.05	1.20	5500	6.42	3.52	26
FSY4020X24M	✓	✓	✓	24	0.06	1.44	6500	7.45	4.50	28
FSY4020X24H	✓	✓	✓	24	0.07	1.68	7500	8.85	5.25	30

Product specification contained herein may be changed without prior notice.

It is therefore advisable to contact FONSONING ELECTRONICS before proceeding with the design of equipment incorporating this product.