
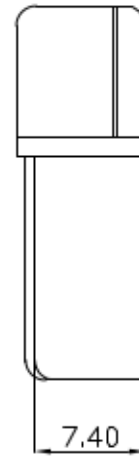
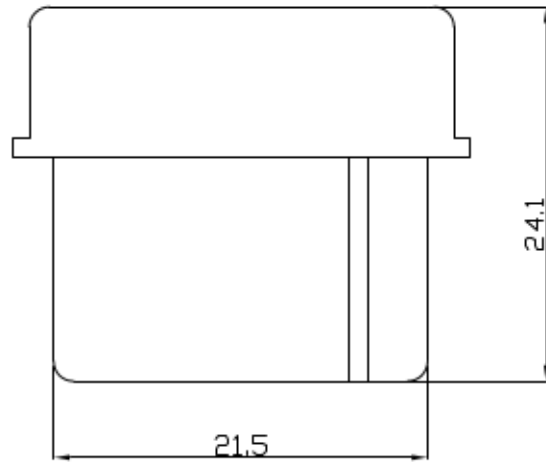


REV.	SPECIFICATION	ECN NO.	APPD.

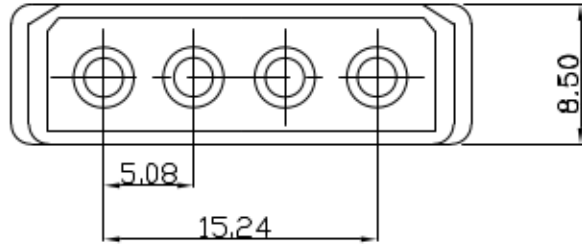

**Material:**

Housing: High Temperature Plastic UL94V-2.

**Electrical Characteristics:**

Dielectric Withstanding Voltage: AC 1500V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 100V.

Operating Temperature: -25°C~+105°C .

**\*RoHS Compliant**

4874- 04 M H B  
 Series No.of Position Male Housing Bulk Package

<b>Tolerances</b> x = ±0.5 .x = ±0.25 .xx = ±0.15	<b>Drawn No.</b>	4874H01001		<b>Title:</b> 4874 Series Housing Male Type Pitch 5.08mm 0704					
	<b>Projection</b>								
	<b>Unit</b>	<b>mm</b>	<b>Scale</b>		1:1				
	<b>Drawn By</b>	Shi 05/05'11							
				<b>P/N:</b>	4874-04MHB				
				<b>SHEET</b>	1/1	<b>Ver. No.</b>		A4	