


Specifications

Detail:

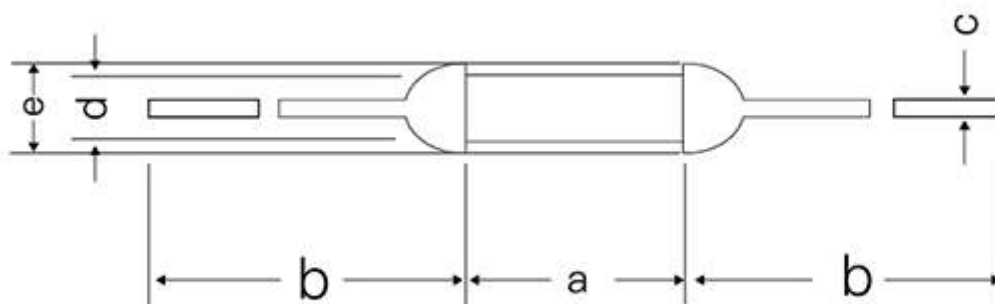

Unit:mm

Model No	a	b	c	d	e
P-3A-F	10.0 ± 0.5	38 ± 3	$\Phi 0.6 \pm 0.02$	$\Phi 3.0 \pm 0.1$	3.3 or below

Model NO.	Tf (°C)	Fusing-off temp. (°C)		Th(°C)	Tm (°C)	Ir(A)	Ur(V)
		IEC	Corp				
P0-3A-F	84	$84+0/-10$	82 ± 2	65	200	3	250
P1-3A-F	102	$102+0/-10$	98 ± 3	80	200	3	250
P2-3A-F	115	$115+0/-10$	112 ± 3	95	200	3	250
P3-3A-F	125	$125+0/-10$	120 ± 3	105	200	3	250
P4-3A-F	130	$130+0/-10$	126 ± 2	107	200	3	250
P5-3A-F	135	$135+0/-10$	131 ± 3	115	200	3	250
P9-3A-F	138	$138+0/-10$	135 ± 2	115	200	3	250
P12-3A-F	145	$145+0/-10$	140 ± 2	126	200	3	250
P7-3A-F	150	$150+0/-10$	145 ± 3	128	200	3	250

Model No.	UL/CUL	VDE	CCC	PSE
P0-3A-F	E140847	40000039	2020980205000145	JET0749-32001-1005
P1-3A-F				JET0749-32001-1003
P2-3A-F				JET0749-32001-1004
P3-3A-F				
P4-3A-F				
P5-3A-F				
P9-3A-F				JET0749-32001-1006
P12-3A-F				
P7-3A-F				

